



## 1" STANDING SEAM SNAPLOCK | ERSM1000




24 & 26 GA GALVALUME & .032" ALUMINUM  
 SMP & PVDF COATING COLOR OPTIONS  
 BEST FOR: RESIDENTIAL ROOFING  
 ROLL FORMED ON SITE  
 OUR CONTRACTORS FAVORITE PANEL!  
 QUICK AND SIMPLE INSTALLATION  
 LONG LASTING FINISH  
 LIGHTEST ROOFING SYSTEM ON THE MARKET  
 ALL PANEL FASTENERS HIDDEN



# PRODUCT OVERVIEW

OUR MOST POPULAR STANDING SEAM PROFILE! THE 1" NAILSTRIP IS CONSIDERED THE STANDARD FOR STANDING SEAM METAL ROOF SYSTEMS. THIS PROFILE ALLOWS FOR A UNIFORM LOOK AS ITS INSTALL METHOD ALLOWS FOR CONCEALED FASTENERS WITHOUT THE USE OF CLIPS. CAPABLE OF WITHSTANDING HIGH WIND PRESSURES AND MAINTAINING AN ATTRACTIVE LOOK. THE ERSM1000 1" STANDING SEAM SNAPLOCK WITH NAILSTRIP IS THE PERFECT CHOICE FOR A FLAWLESS METAL ROOF LOOK.

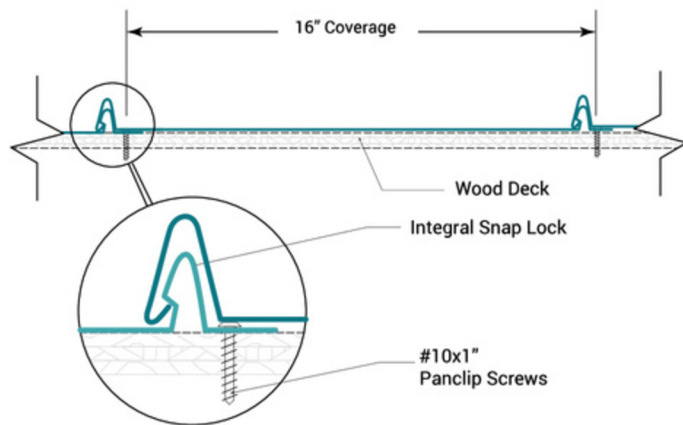

Panel design



## PANEL PROFILE



## 1" STANDING SEAM SNAPLOCK | ERSM1000

24 & 26 GA GALVALUME & .032" ALUMINUM  
SMP & PVDF COATING COLOR OPTIONS  
NAILSTRIP INSTALLATION ONLY  
16" PANEL COVERAGE  
CLASS A FIRE RATED  
MINIMUM 15/32 PLYWOOD SUBSTRATE  
REROOF OVER 1 LAYER EXISTING SHINGLES  
SALT WATER FINISH WARRANTIES AVAILABLE  
MIN SLOPE: NON HVHZ 1/4"/12", HVHZ 1"/12"  
SLOPES <3"/12" REQUIRE CONTINUOUS SILICONE AT SEAM  
FASTENERS: #10X1" PAN, 3" ON ENDS, 6" OC FIELD  
MAX DESIGN PRESSURE: -116PSF,  
-176PSF W/ CONTINUOUS SEALANT AT SEAM  
HIGH VELOCITY HURRICANE ZONE (HVHZ) APPROVED  
COMPLETE STATE OF FLORIDA APPROVAL



SCAN FOR PRODUCT  
APPROVAL DOCUMENTS

