

1.5" STANDING SEAM SNAPLOCK | ERSM1050




24 GA GALVALUME & .032" ALUMINUM
SMP & PVDF COATING COLOR OPTIONS
BEST FOR: RESIDENTIAL
ROLL FORMED ON SITE
QUICK AND SIMPLE INSTALLATION
LONG LASTING FINISH
LIGHTEST ROOFING SYSTEM ON THE MARKET
ALL PANEL FASTENERS HIDDEN



PRODUCT OVERVIEW

THIS TRADITIONAL PROFILE COMES WITH A TALLER SEAM FOR A MORE APPEALING LOOK. THE COMPLEXITY OF THE 1.5" STANDING SEAM MEETS THE CLIPLESS SIMPLICITY OF THE NAILSTRIP. THE ERSM1050 PROVIDES AN EASY INSTALLATION AND HIDES ALL FASTENERS GIVING YOU GREATER STRENGTH AND A MORE NATURAL LOOK.

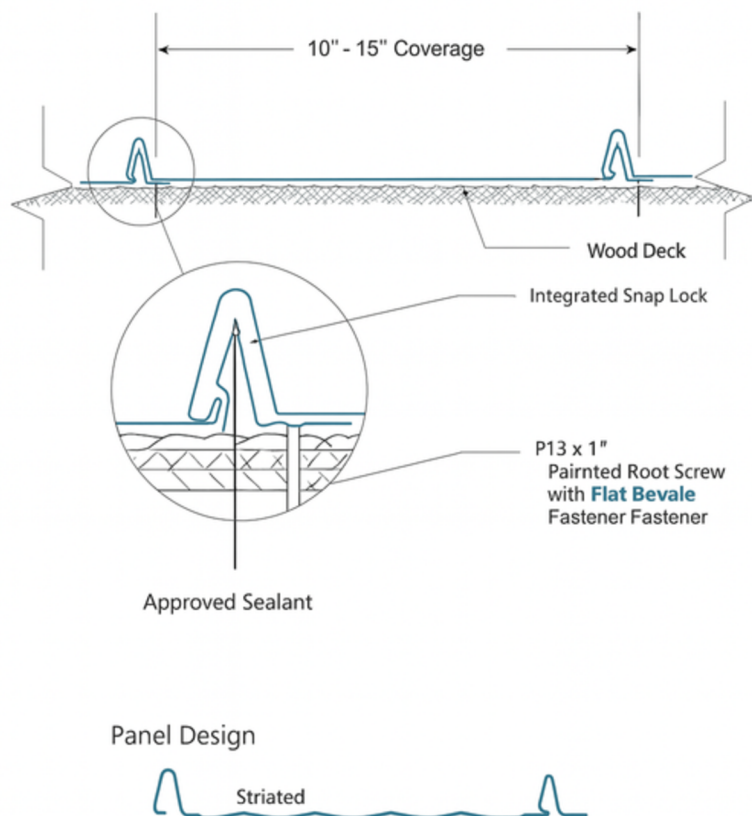

PANEL PROFILE



1.5" STANDING SEAM SNAPLOCK | ERSM1050

24 GA GALVALUME & .032" ALUMINUM
SMP & PVDF COATING COLOR OPTIONS
NAILSTRIP INSTALLATION ONLY
15" PANEL COVERAGE
CLASS A FIRE RATED
MINIMUM 15/32 PLYWOOD SUBSTRATE
REROOF OVER 1 LAYER EXISTING SHINGLES
SALT WATER FINISH WARRANTIES AVAILABLE
MIN SLOPE: NON HVHZ 1/4"/12", HVHZ 1"/12"
REQUIRES CONTINUOUS SILICONE AT SEAM
FASTENERS: #10X1" PAN, 3" ON ENDS, 6" OC FIELD
MAX DESIGN PRESSURE: -112.5PSF
HIGH VELOCITY HURRICANE ZONE (HVHZ) APPROVED
COMPLETE STATE OF FLORIDA APPROVAL

SCAN FOR PRODUCT
APPROVAL DOCUMENTS

