




1.5" STANDING SEAM SNAPLOCK | ERSM0450




24 & 26 GA GALVALUME & .032" ALUMINUM
 KYNAR COATING COLOR OPTIONS
 BEST FOR: RESIDENTIAL
 ROLL FORMED ON SITE
 SIMPLE SNAP ON 2 SCREW CLIP INSTALLATION
 LONG LASTING FINISH
 OUR CONTRACTORS FAVORITE PANEL!
 LIGHTEST ROOFING SYSTEM ON THE MARKET
 ALL PANEL FASTENERS HIDDEN

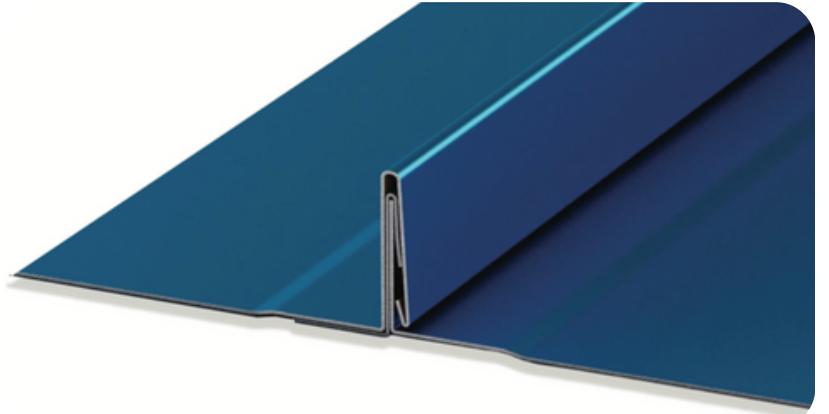

PRODUCT OVERVIEW

THE ERSM0800 PANEL FEATURES A BOLD 1.5" STANDING SEAM PROFILE WITH A CLEAN, MODERN LOOK. THIS PANEL INSTALLS USING A TWO-SCREW 3" FIXED CLIP, OFFERING ENHANCED STRENGTH AND LONG-TERM DURABILITY. DELIVERING A SECURE AND LASTING RESULT—IDEAL FOR PROJECTS WHERE PERFORMANCE MATTERS MOST.

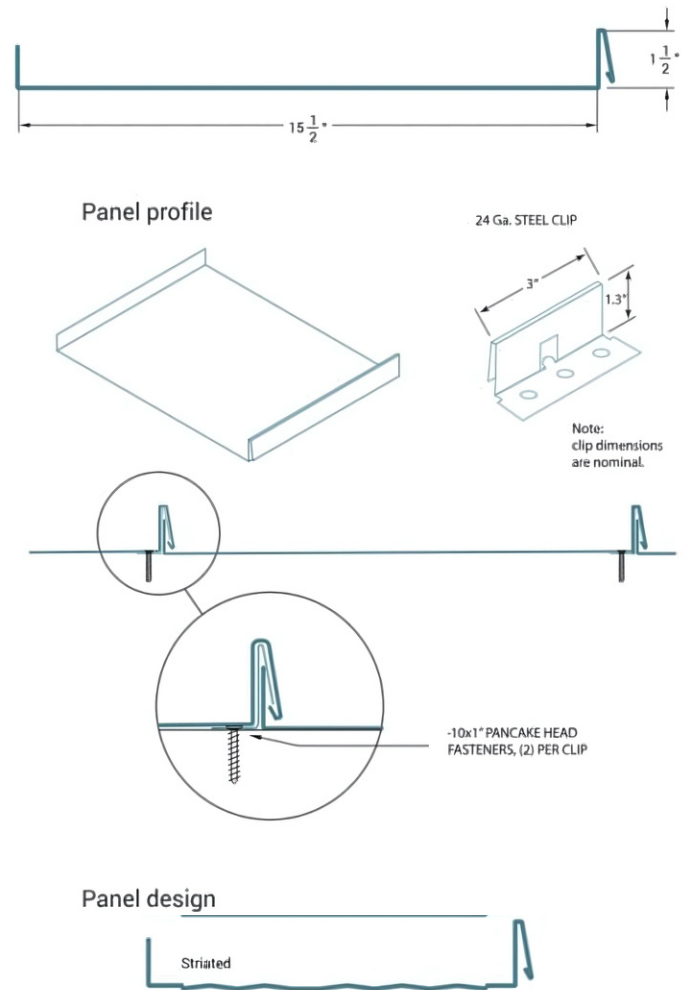

PANEL PROFILE



1.5" STANDING SEAM SNAPLOCK | ERSM0450

24 & 26 GA GALVALUME & .032" ALUMINUM
KYNAR COATING COLOR OPTIONS
CLIP INSTALLATION ONLY
16" PANEL COVERAGE
CLASS A FIRE RATED
MINIMUM 15/32 PLYWOOD SUBSTRATE
REROOF OVER 1 LAYER EXISTING SHINGLES
SALT WATER FINISH WARRANTIES AVAILABLE
MIN SLOPE: NON HVHZ 1/2"/12", HVHZ 2"/12"
SLOPES <3"/12" REQUIRE CONTINUOUS SILICONE AT SEAM
FASTENERS: #10X1" PAN, 4" ON ENDS, 12" OC CLIPS
MAX DESIGN PRESSURE: -116PSF
HIGH VELOCITY HURRICANE ZONE (HVHZ) APPROVED
COMPLETE STATE OF FLORIDA APPROVAL

SCAN FOR PRODUCT
APPROVAL DOCUMENTS

