





5V CRIMP PANEL | ERSM0500

24 & 26 GA GALVALUME & .032" ALUMINUM
 KYNAR COATING COLOR OPTIONS
 BEST FOR: RESIDENTIAL & COMMERCIAL
 ROLL FORMED ON SITE
 OUR QUICKEST AND SIMPLEST INSTALLATION
 LONG LASTING FINISH
 LIGHTEST ROOFING SYSTEM ON THE MARKET
 EXPOSED FASTENER SYSTEM

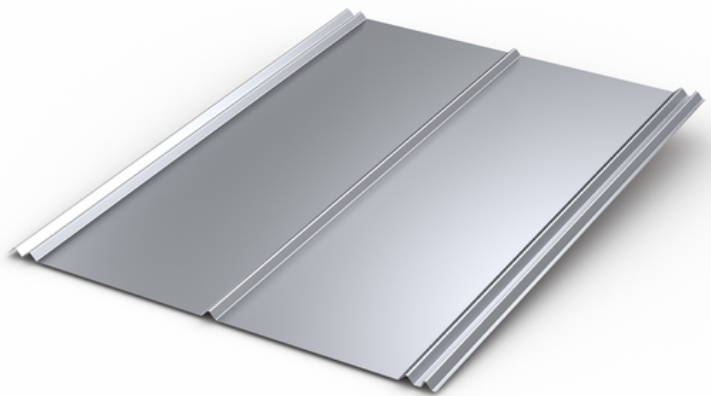

PRODUCT OVERVIEW

THE TRADITIONAL 5V CRIMP PROFILE WITH EXPOSED FASTENERS, BRINGS THE POPULAR KEY WEST STYLE TO YOUR PROJECT. THIS IS OUR MOST COMMON PROFILE WHICH MEANS A QUICK TURN OUT ON YOUR ROOF. QUICK AND COMPREHENSIVE INSTALL METHOD THAT WILL NOT BREAK THE BANK. THE ERSM0500 5V CRIMP PANEL IS THE PERFECT CHOICE FOR STYLE AND SIMPLICITY AND COST EFFECTIVENESS.

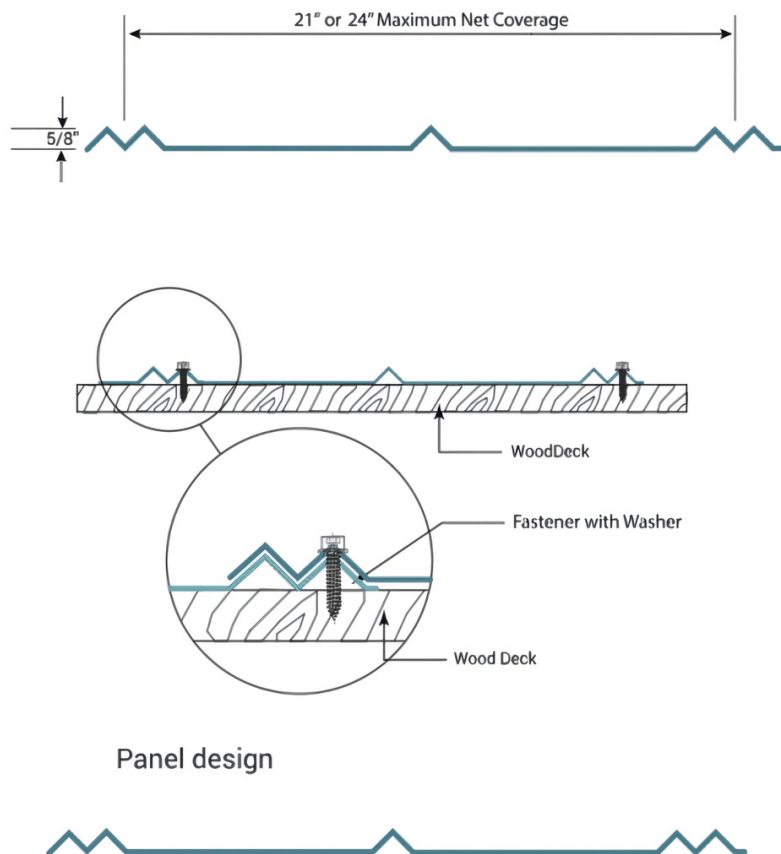

PANEL PROFILE



5V CRIMP PANEL | ERSM0500

24 & 26 GA GALVALUME & .032" ALUMINUM
KYNAR COATING COLOR OPTIONS
SELF SEALING EXPOSED FASTENER INSTALLATION
24" COVERAGE
CLASS A FIRE RATED
MINIMUM 15/32 PLYWOOD SUBSTRATE
REROOF OVER 1 LAYER EXISTING SHINGLES
SALT WATER FINISH WARRANTIES AVAILABLE
MIN SLOPE: NON HVHZ 1/2"/12", HVHZ 2"/12"
SLOPES <3"/12" REQUIRE CONTINUOUS SILICONE AT SEAM
FASTENERS: #10X1.5" SEAL, 4" ENDS, 16" MAX OC FIELD,
MAX 12" ACROSS PANEL
MAX DESIGN PRESSURE: -117.75PSF,
-206PSF W/ 8" MAX OC FIELD
HIGH VELOCITY HURRICANE ZONE (HVHZ) APPROVED

SCAN FOR PRODUCT
APPROVAL DOCUMENTS

